
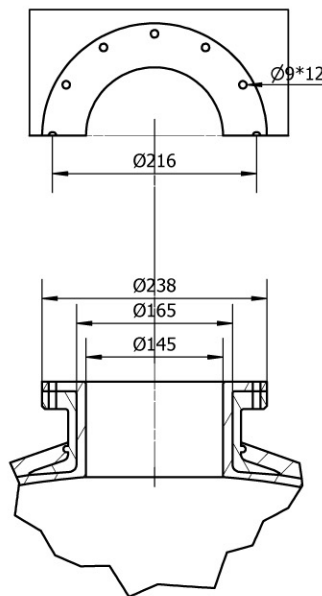


A-A
1:8


B
1:4

Model	Height	Vol	Weight
4272H-6T6B	2270 mm	1389 l	

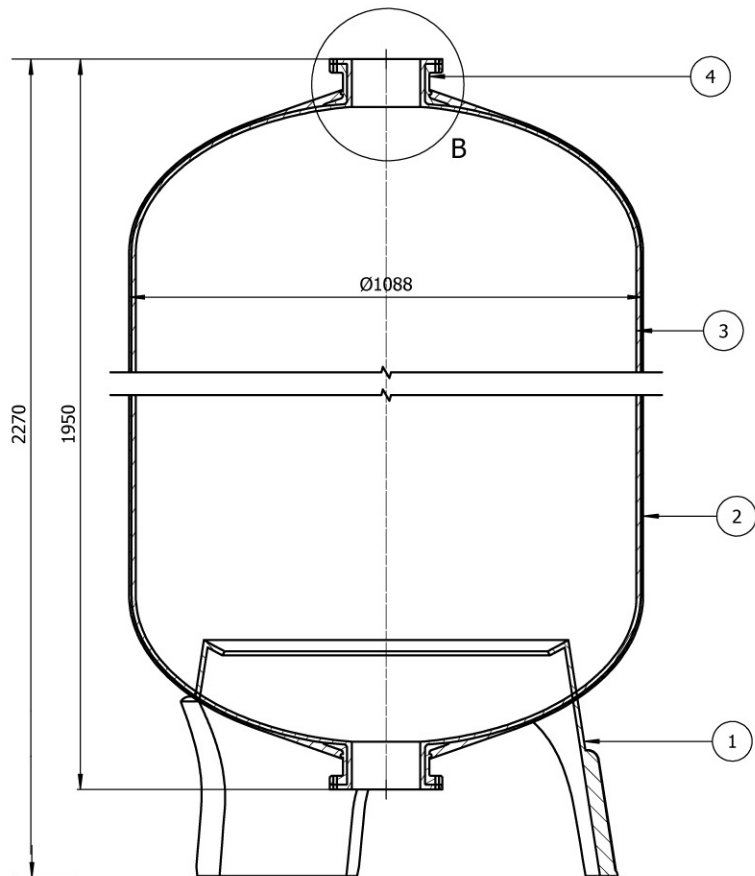


NOTES:

1. Inner shell - Polyethylene (PE) seamless one-piece tank liner
2. Outer shell - Continuous strands of fiber-glass with high strength epoxy resin
3. Bottom base - FRP reinforced tripod base
4. Opening - 6 inch Aluminium opening
5. Tanks meet all applicable specification of NSF/ANSI 061 standard
6. Operating Specifications:
Maximum Working Pressure : 150 PSI (1.0MPa)
Temperature :1-49 C (34-120 F)
Maximum Vacuum:127mm Hg(5" Hg)
7. Liner inspection
No more than 20 internal , external blemishes, burnt debris
No internal , external blemishes, burnt debris larger than 5 *5 mm
8. Surface finish
9. Surface to be free of resin, glass,nicks,barbed filament
10. Tank to be bonded to base
11. The base to be level correction
12. Top and bottom opening to be parallel,top opening to be parallel with the base

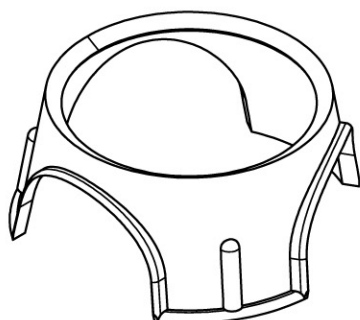

C-C
1:8

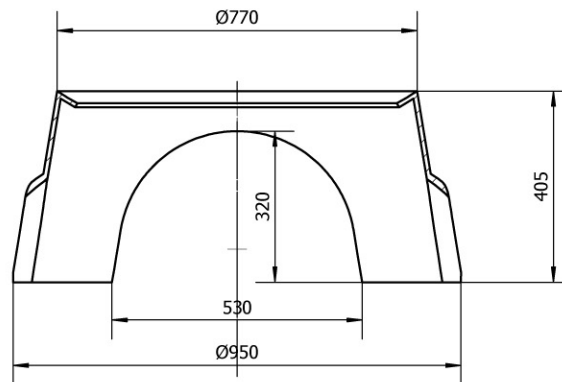

4	Flange	2	Aluminium	
3	Liner	1	PE	
2	Outer sheel	1	FRP	
1	Base	1	FRP	
项目	名称	数量	材料	注释

明细栏

						江苏开能华宇环保设备有限公司			
标记	数量	分区	更改文件号	备注	日期	阶段标记	重量(Kg)	比例	4272H-6T6B
设计	陈振华	2014/3/6	标准化						
审核									
工艺				批准		本图尺寸均以mm计，图中尺寸请勿量取			